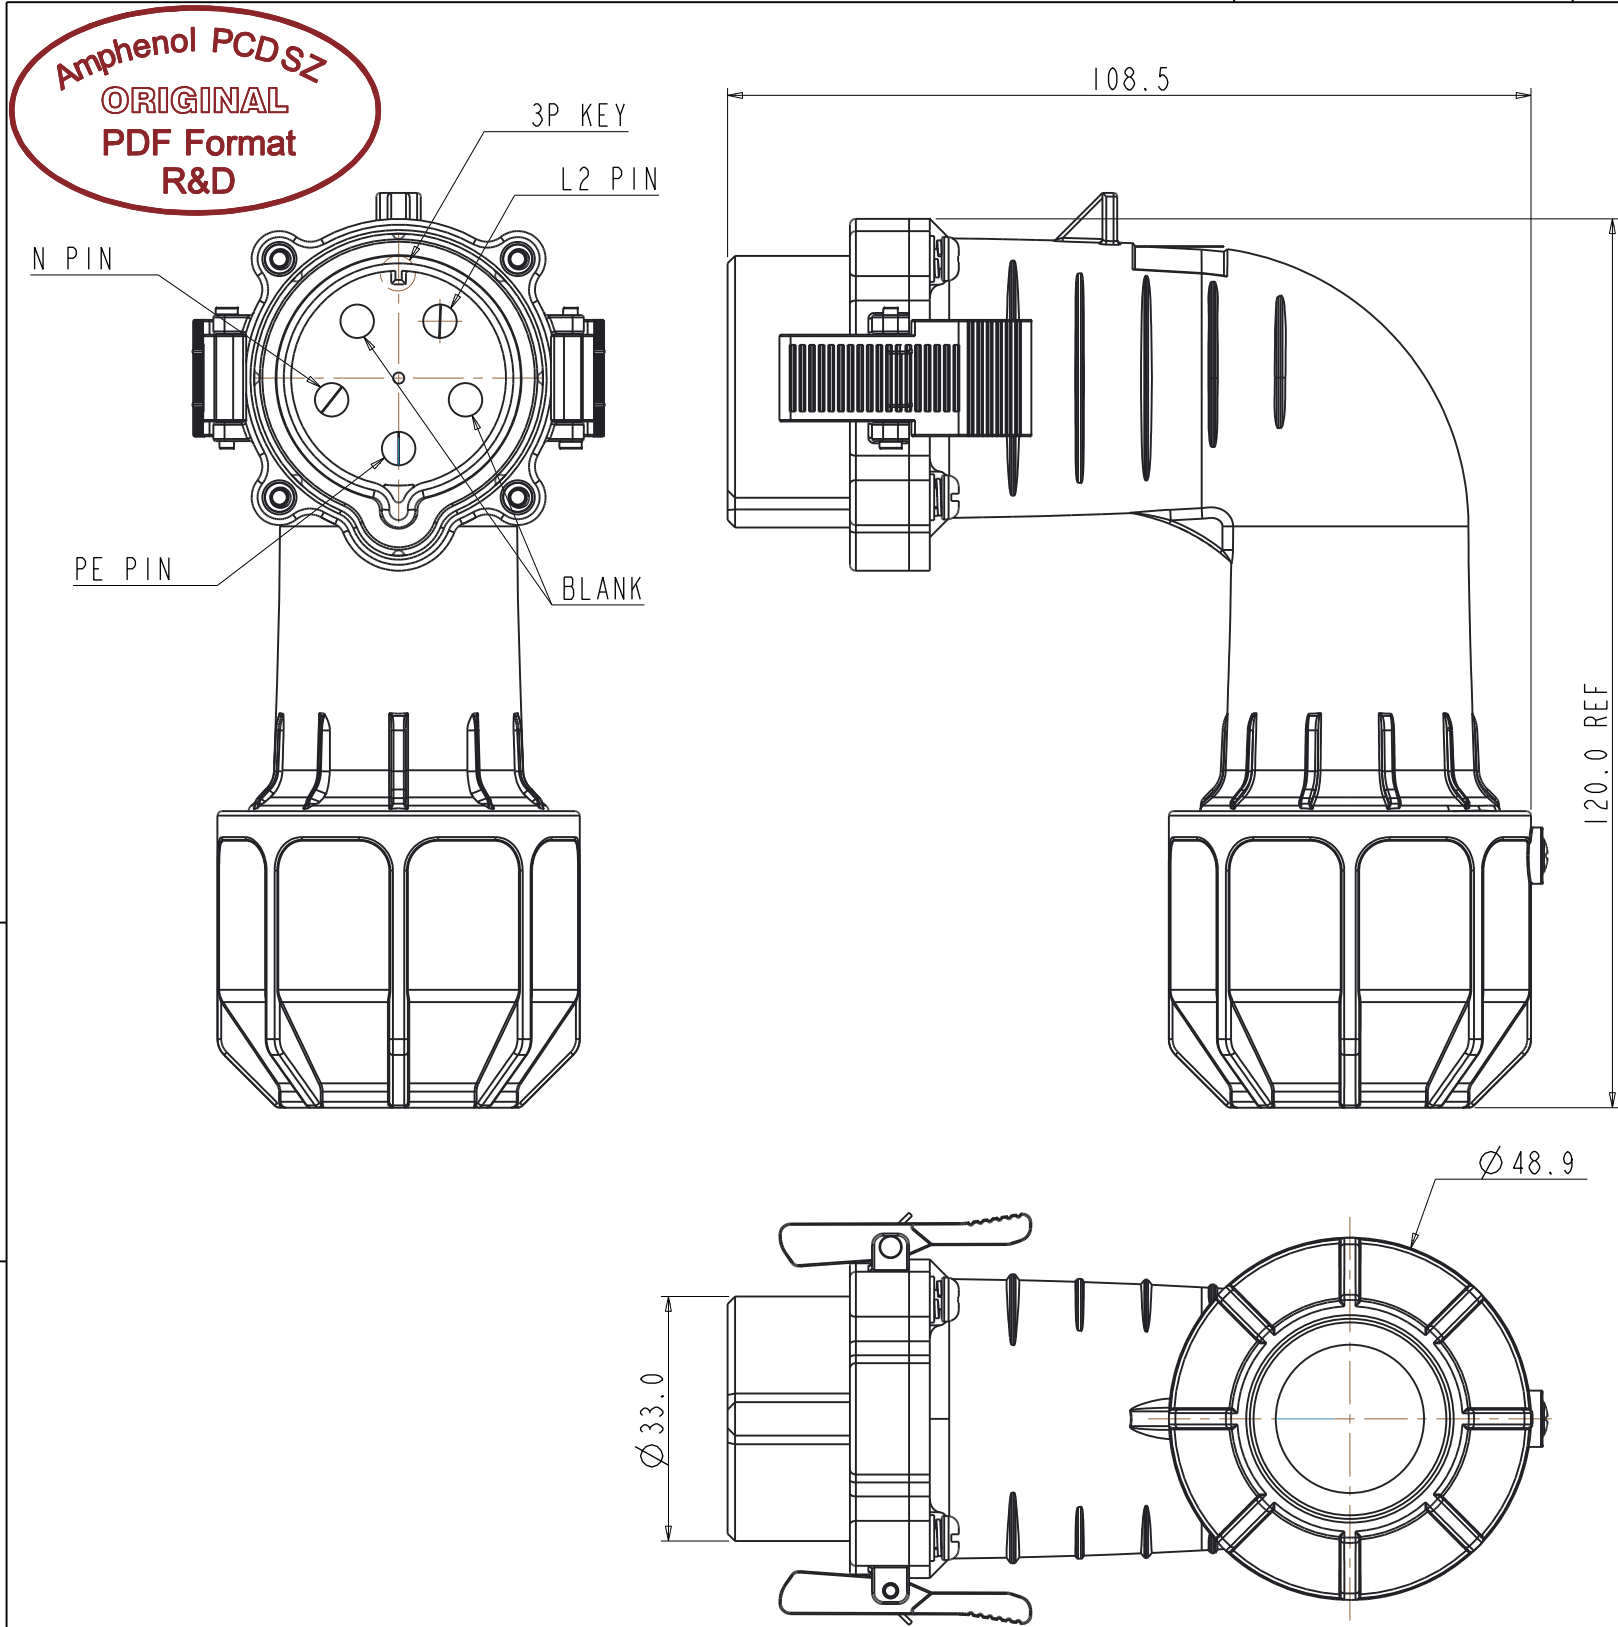


REV	ECN	DESCRIPTION	DATE	MODIFIED
VO-1		PRE-RELEASE	Oct-16-20	

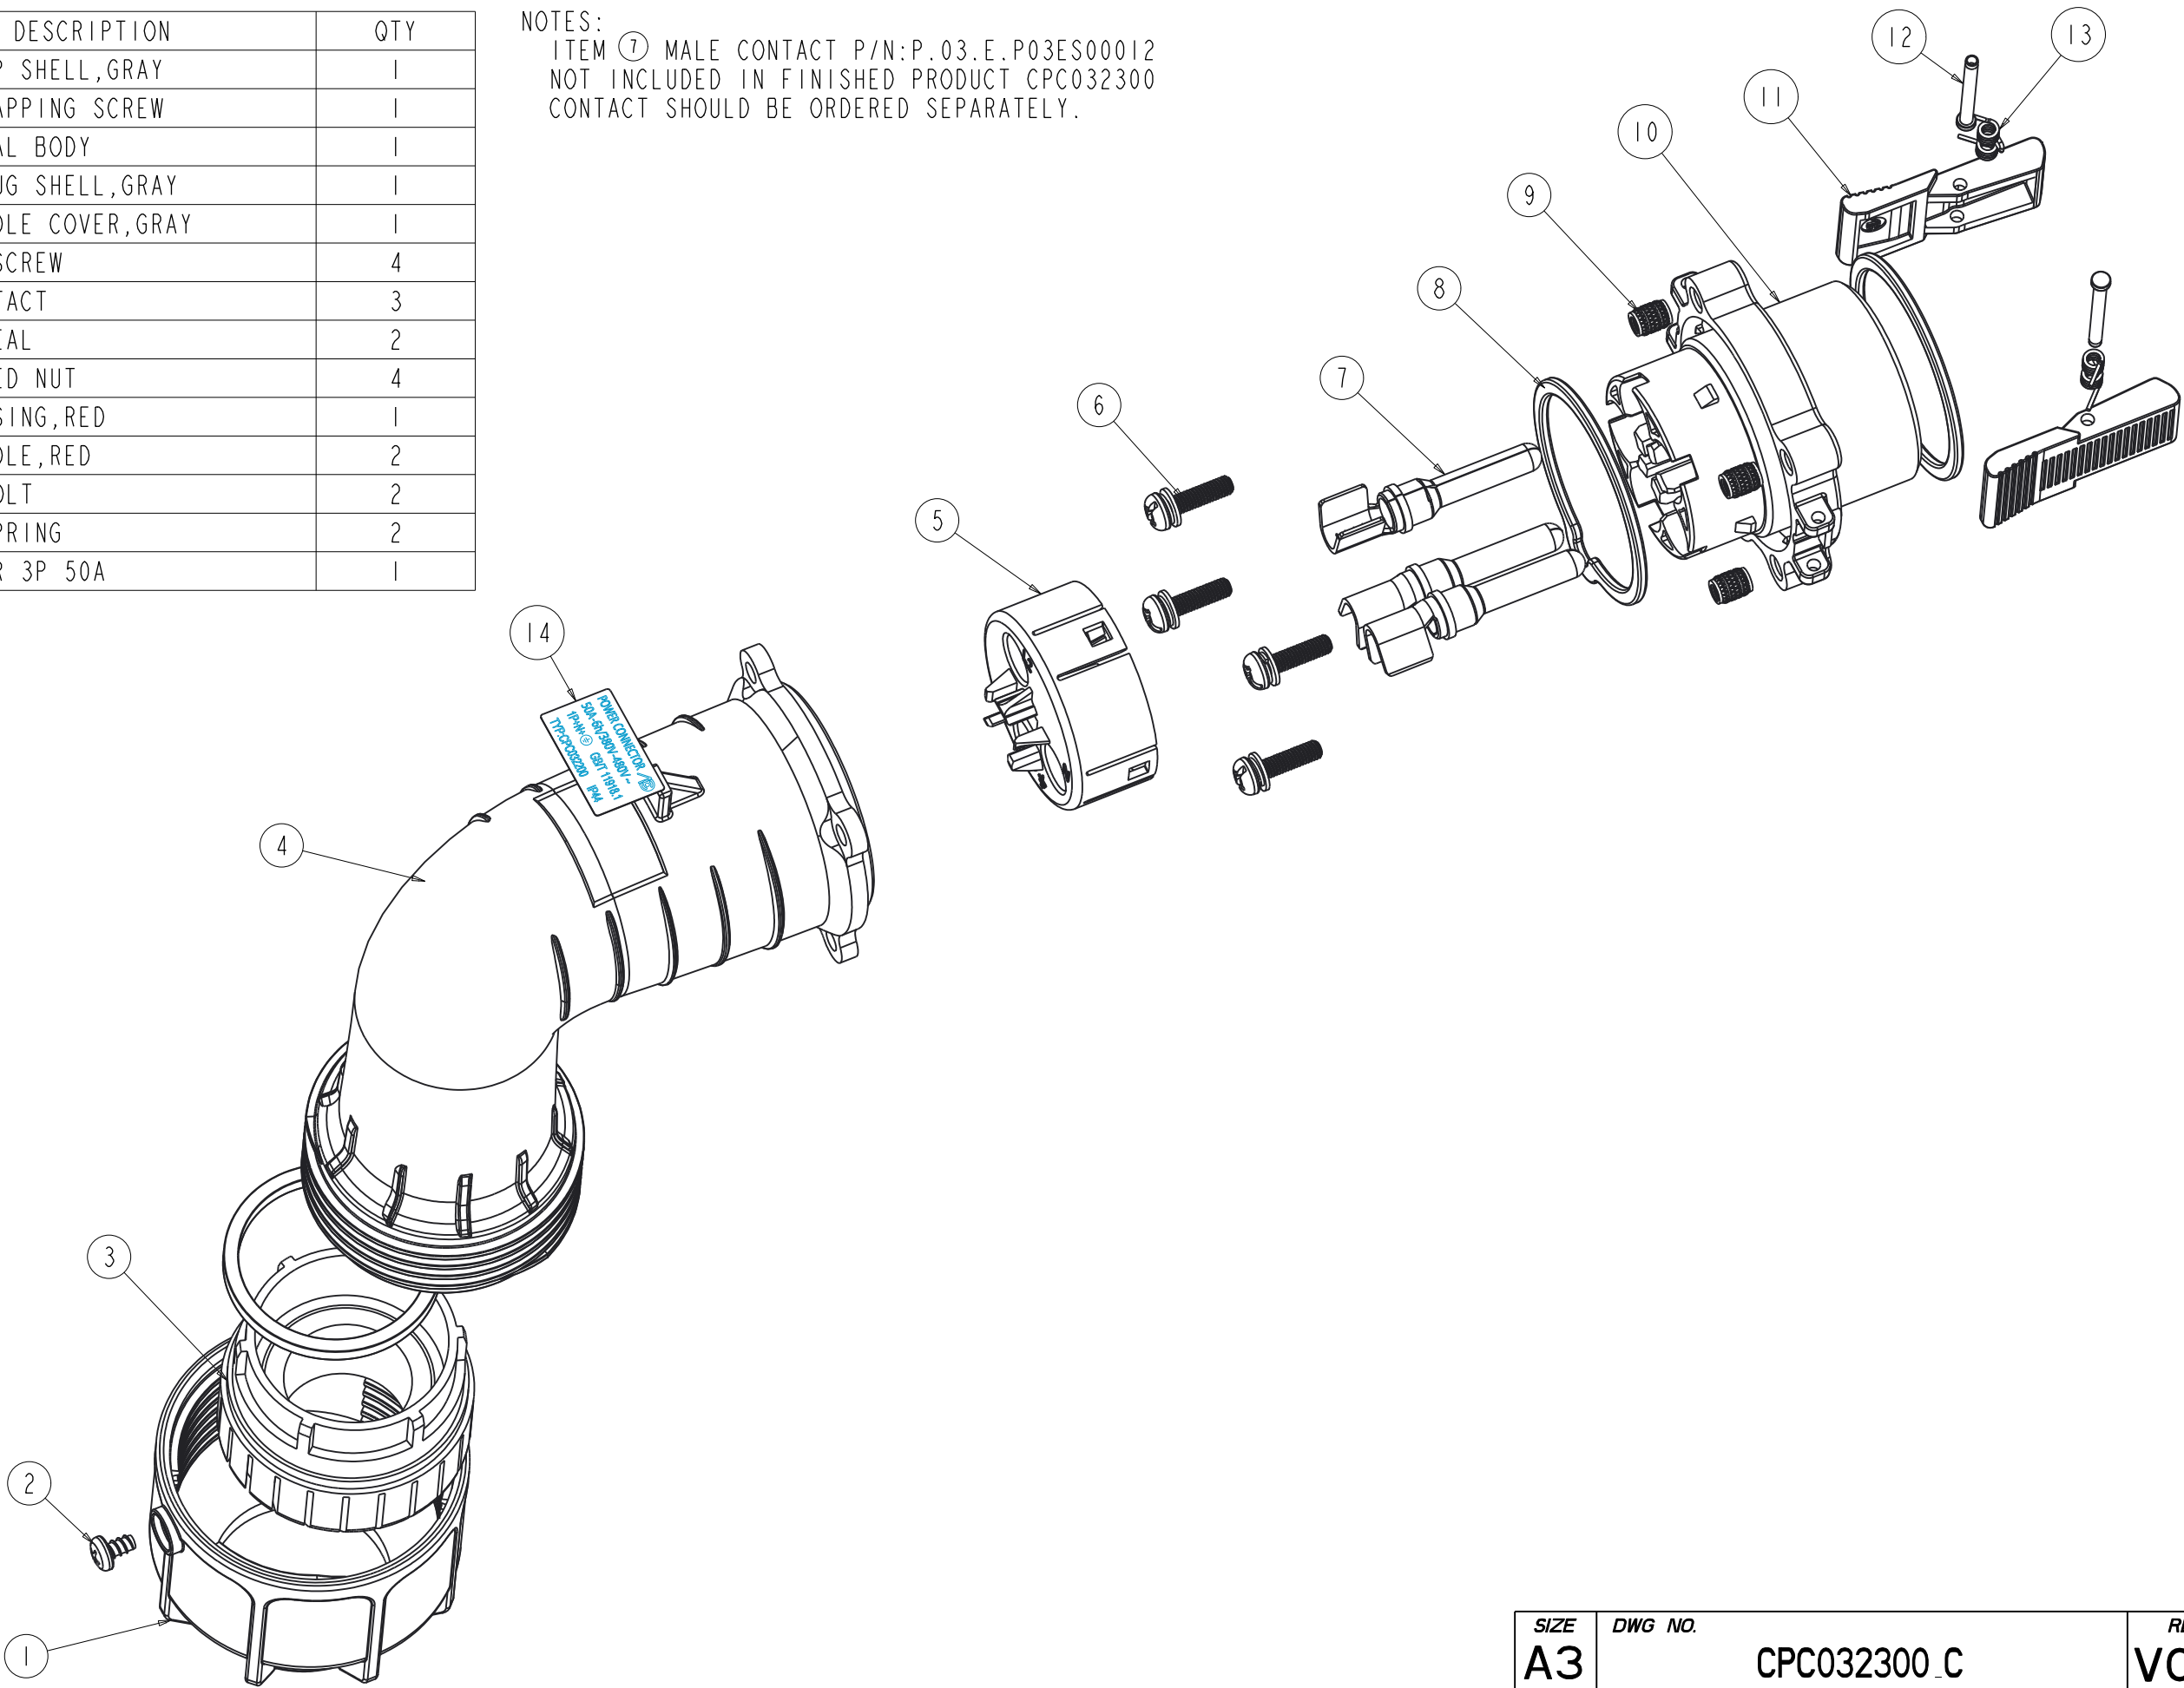


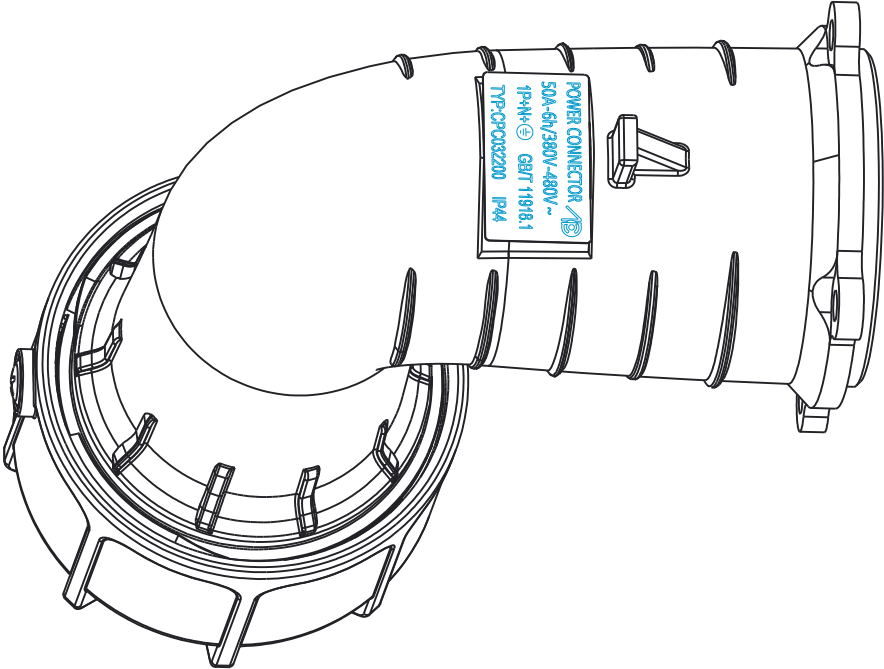
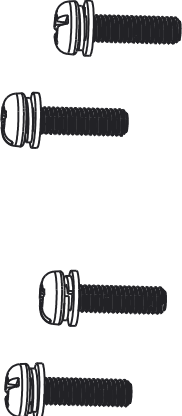

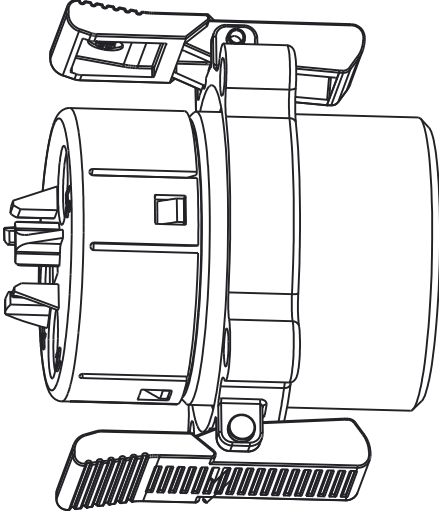
- NOTES:
- MATERIALS:
HOUSING: PBT/PA
CONTACT: COPPER (CONTACT SHOULD BE ORDERED SEPARATELY).
 - ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 50A
VOLTAGE RATING: 480V
WITHSTAND VOLTAGE: 2000V/MIN.
INSULATION RESISTANCE: 500MΩ.
 - OPERATING TEMPERATURE RANGE: -40°C TO +105°C.
 - EXTERNAL DIAMETER OF THE CABLE: $\varnothing 18.5 \pm 0.8$ mm
 - MATING CYCLES $\square$ 200 TIMES MAX.
 - WATERPROOF: IP44 (MATED CONDITION).
 - RoHS COMPLIANCE.

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol PCD Shenzhen		TITLE				
ANSI Y14.5M	.X ±0.5		ENGR		POWER PLUG CONNECTOR ELBOW,50A,3P				
UNITS: MM	.XX ±0.05		Oct-13-20						
Pro/E FILE	ANGLES ±2°								
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF Amphenol PCD Shenzhen Co. Ltd Amphenol PCD Shenzhen Co. Ltd RESERVES THE RIGHT TO CLARIFY THIS DRAWING		CHKD		SIZE	DWG NO.		REV	
			APPD		A3	CPC032300_C		VO-2	
					CODE: 58982		SCALE: 1:1		SHEET 1 OF 3

ITEM NO.	DESCRIPTION	QTY
1	WIRE CLIP SHELL,GRAY	1
2	ST 2.9 TAPPING SCREW	1
3	CABLE SEAL BODY	1
4	ELBOW PLUG SHELL,GRAY	1
5	PLUG MIDDLE COVER,GRAY	1
6	M3 SEMS SCREW	4
7	MALE CONTACT	3
8	RUBBER SEAL	2
9	M3 KNURLED NUT	4
10	PLUG HOUSING,RED	1
11	PLUG HANDLE,RED	2
12	HANDLE BOLT	2
13	HANDLE SPRING	2
14	LABLE FOR 3P 50A	1

NOTES:
ITEM ⑦ MALE CONTACT P/N:P.03.E.P03ES00012
NOT INCLUDED IN FINISHED PRODUCT CPC032300
CONTACT SHOULD BE ORDERED SEPARATELY.



A	B	C	D
ITEM ①②③④④ ASSEMBLED TOGETHER	ITEM ⑥ PACKING 4PCS SCREWS WITH PLASTIC BAGS	ITEM ⑦ CONTACT P/N:P.03.E.P03ES00012 NOT INCLUDED IN FINISHED PRODUCT CPC032200	ITEM ⑤⑧⑨⑩⑪⑫⑬ ASSEMBLED TOGETHER
			
	NOTES: INSTALLATION TORQUE 5-6 kgf.cm .	NOTES: CONTACT SHOULD BE ORDERED SEPARATELY	