
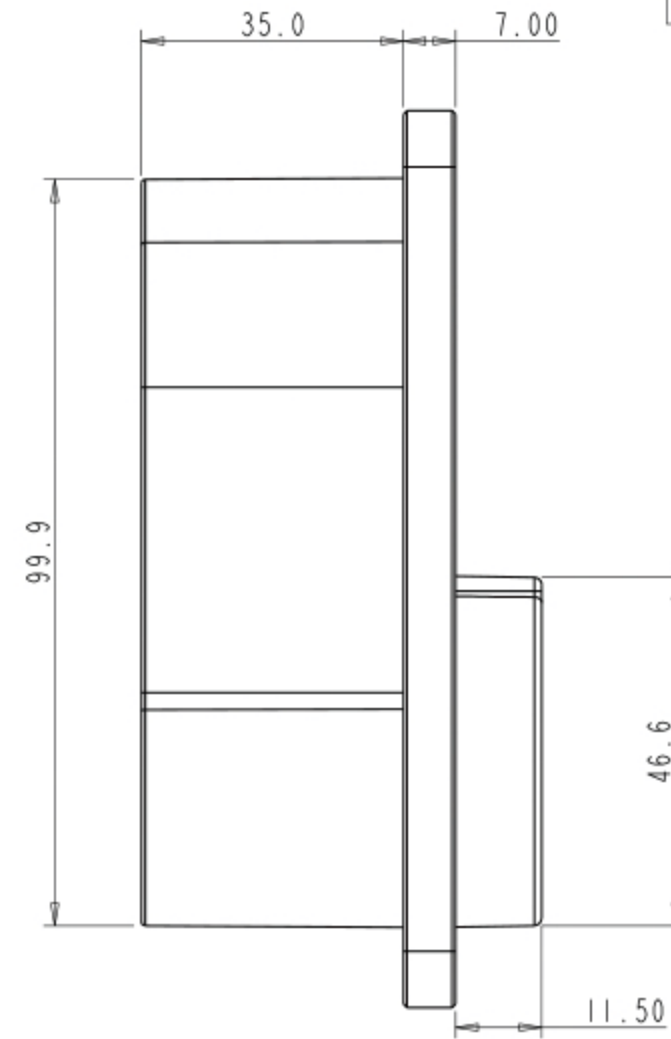


Amphenol PCD SZ
ORIGINAL
PDF Format
R&D

REV	ECN	DESCRIPTION	DATE	MODIFIED
1		PRE- RELEASE	2019-11.29	
2	R7457N	1.CHANGE THE DRAWING NUMBER TO A SERIES DRAWING NUMBER 2.ADD A NEW P/N	2023.09.19	

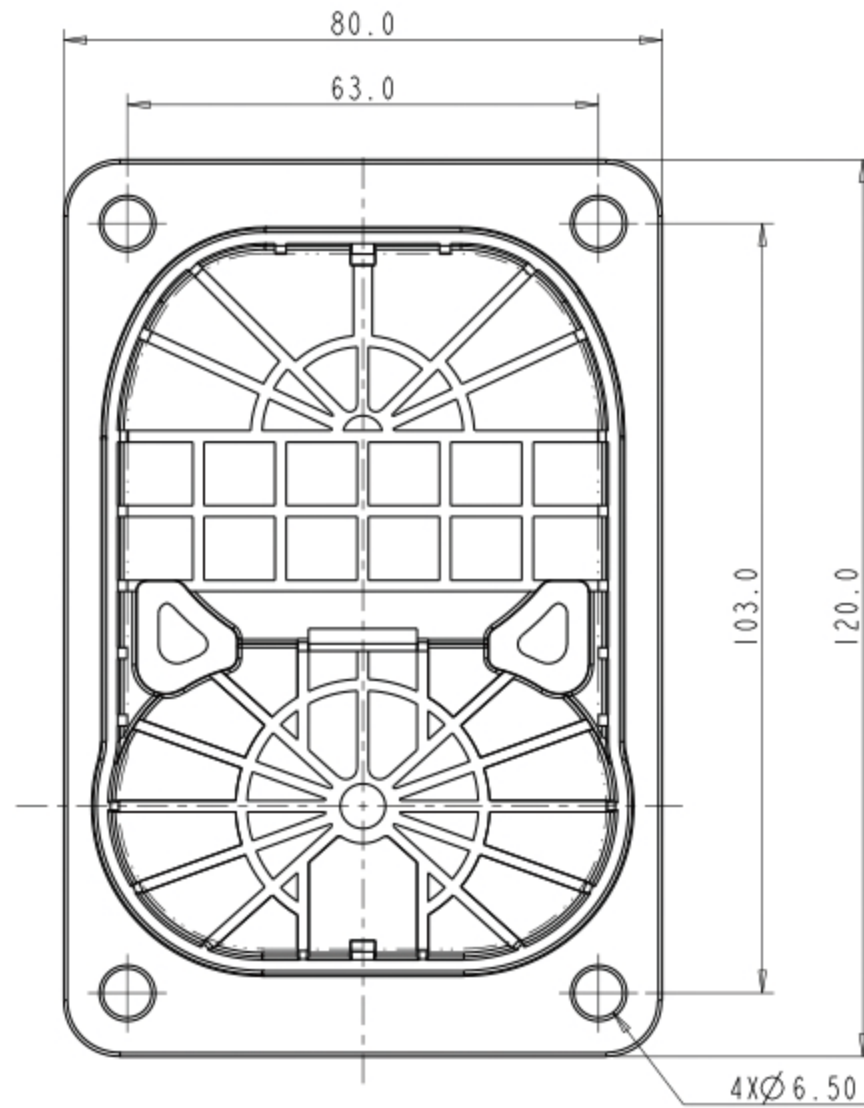


安费诺精密连接器(深圳)有限公司
Amphenol PCD Shenzhen


受控文件

2023年10月13日


C220027208B
WITH DRAINAGE OUTLET

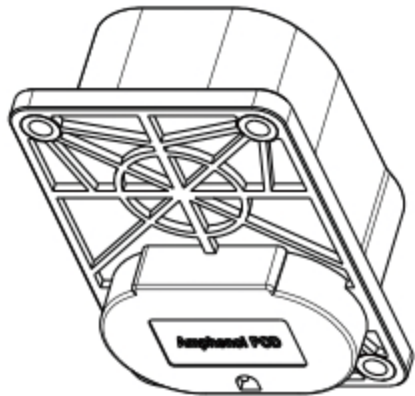


比例 1:2

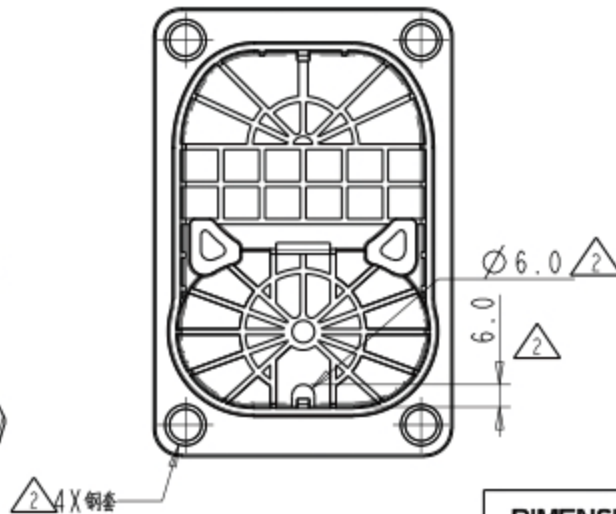

C220027208
WITHOUT DRAINAGE OUTLET

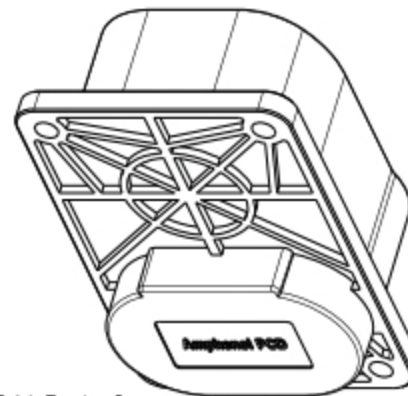

SCALE 1:2

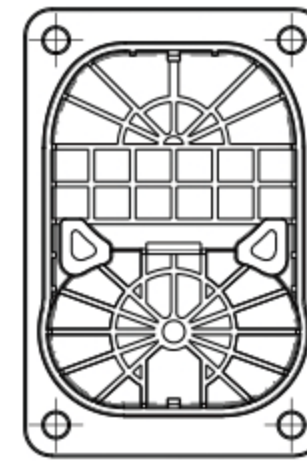

NOTE:
1.MATERIAL:PC
2.INSULATOR INFLAMMABILITY:UL94,V-0
3.AMBIENT TEMPERATURE:-30~70°C
4.BOLT RECOMMENDED TORQUE:6.0N.m

DIMENSIONS		TOLERANCES		PROJECTION		Amphenol PCD Shenzhen		TITLE					
ANSI Y14.5M		.X ±0.5				ENGR							
UNITS: MM		.XX ±0.05				2018.08.20							
Pro/E FILE		ANGLES ±2°											
ORIGINAL		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF Amphenol PCD Shenzhen Co. Ltd Amphenol PCD Shenzhen Co. Ltd RESERVES THE RIGHT TO CLARIFY THIS DRAWING				CHKD		SIZE		DWG NO.		REV	
						APPD		A3		C-C220027208X		2	
										SCALE: 1:1		SHEET 1 OF 1	