


Amphenol PCD SZ
ORIGINAL
PDF Format
R&D

REV	ECN	DESCRIPTION	DATE	MODIFIED
2		PRE-RELEASE	2016-12-27	
3		UPDATED DRAWING	2018-10-26	

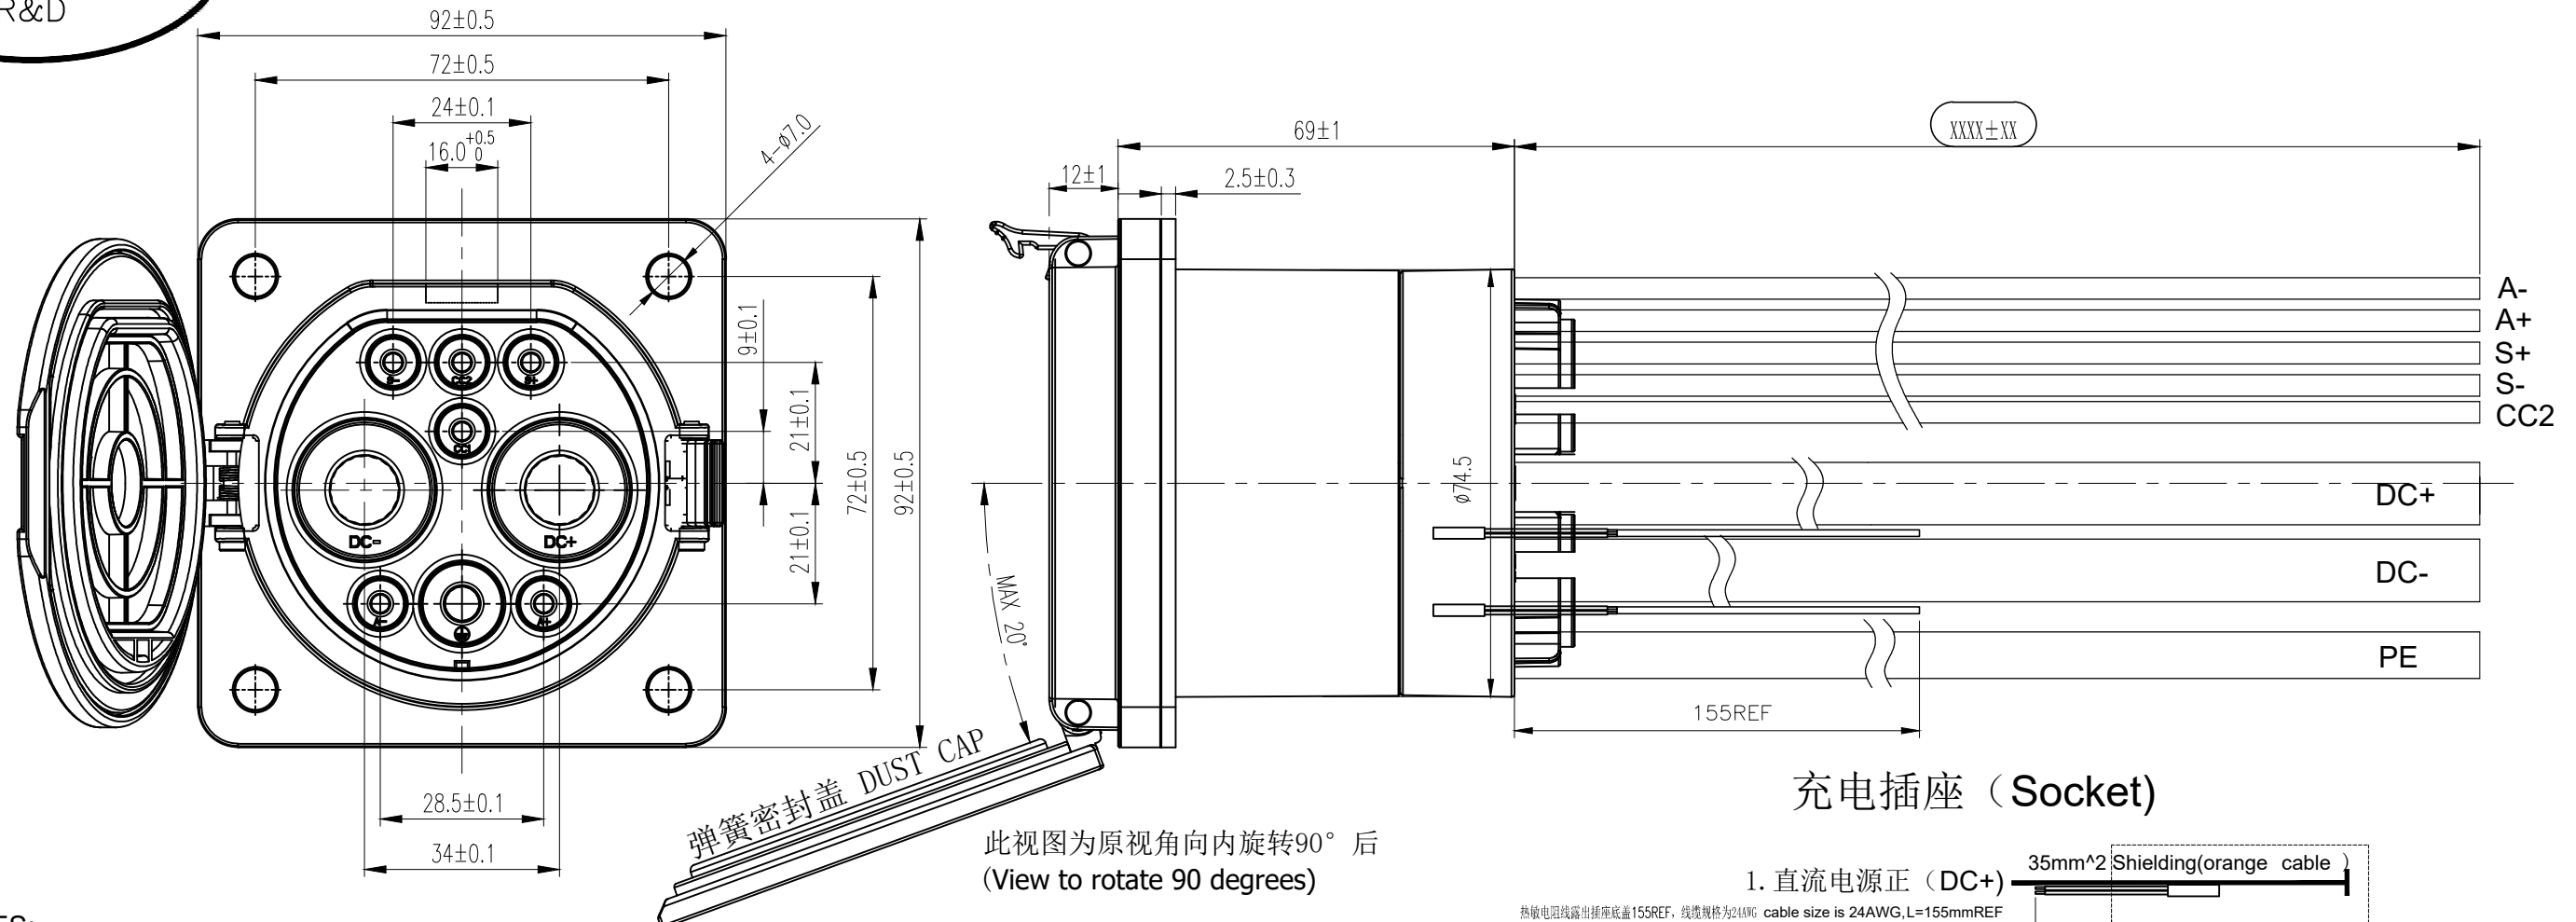

注释NOTES:

- ◎ 1. 环境温度 (AMBIENT TEMPERATURE): -30°C~+50°C;
- ✦ 2. 工作电压&额定电流 (RATED VOLTAGE&RATED CURRENT):
 - 2.1 DC+: 750V/1000V DC 125A
 - 2.2 DC-: 750V/1000V DC 125A
 - 2.3 PE: ground/earth接地
 - 2.4 S+: 30V 2A
 - 2.5 S -: 30V 2A
 - 2.6 CC1: 30V 2A
 - 2.7 CC2: 30V 2A
 - 2.8 A +: 30V 20A
 - 2.9 A -: 30V 20A
- 3. 设计标准参考国标 (COMPLY WIHT): GB/T 20234-2015;
- 4. HVCO-F-BT-R12-SF935R-LXXXX


长度 (LENGTH):
500MM:L0500
1000MM:L1000
3000MM:L3000.....

公差表 (LIST OF TOLERANCE):

长度 (LENGTH)	公差 (TOLERANCE)
0-1000 MM	±50
1001-5000 MM	±100
>5000 MM	±200

安费诺精密连接器(深圳)有限公司
Amphenol PCD Shenzhen
受控文件
2019年11月21日

充电插座 (Socket)

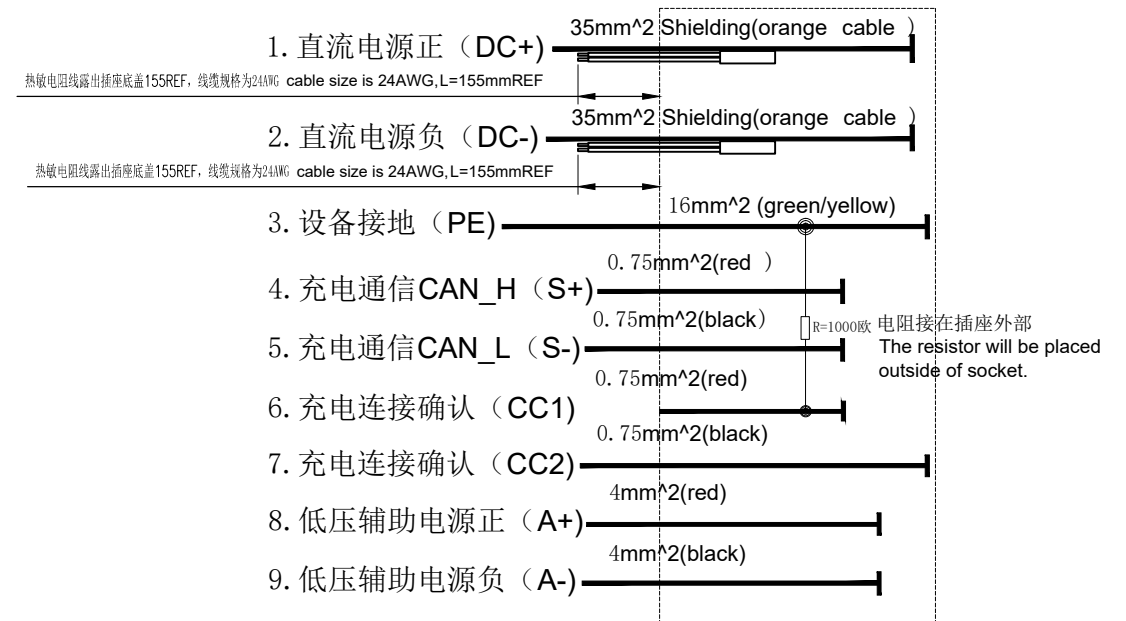

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd Shenzhen		TITLE		
ANSI Y14.5M UNITS: MM	.X ± 0.5 .XX ± 0.3 ANGLES ± 2.0°		ENGR	2016-06-14	VEHICLE COUPLER SOCKET DC 125A CABLE ASSEMBLY		
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN		CHKD	APPD	SIZE A3	DWG NO. C-HVCOFBTR12SF935RLXXXX	REV 3
			CODE:	SCALE 1:1	SHEET 1 OF 1		