

***Notes / 技术参数:**

Material 材料\ Finish 表面处理

Shells&Coupling外壳 : Aluminum alloy 铝合金

/ Olive drab zinc plated 镀绿锌

Ring 卡环 : Aluminum alloy 铝合金

Insert 插芯: Thermoplastics UL94-V0 热塑料

Contact 插针: 12x #12 Socket contacts (需单独购买)

Copper alloy 铜合金

Contact plated crimp type 镀银, 压接形式

Mechanical data 机械参数

Operating Temperature 温度范围: -55°C ~ +125°C

Durability 机械寿命: 500 cycles

Salt Spray 盐雾: 96H

Electrical data 电气参数:


Rated Voltage 额定电压 : 900V(AC)

Rated Current 额定电流 : 23A Max(#12 contacts)

Withstanding Voltage 耐压: 2800V/AC

Insulation Resistance: 5000 MΩ Min

Contact Resistance: Less than 1.3millionms(#12 contacts)

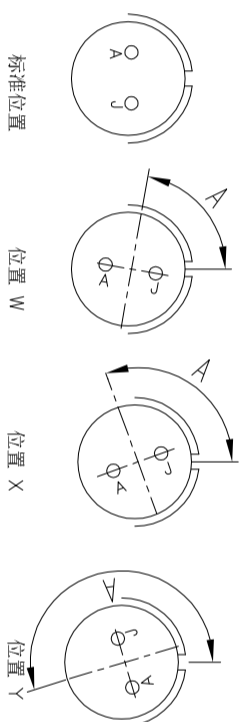

ASVG06RRS2851SCGZLC	-	标准位置
ASVG06RRS2851SCYGZLC	Y	190°
ASVG06RRS2851SCXGZLC	X	135°
ASVG06RRS2851SCWGZLC	W	80°
P/N	Direction	Revolution Angle

DIMENSIONS	ANSI Y14.5M	TOLERANCES	PROJECTION	TITLE			
	UNITS: MM			X ± 0.5	Amphenol Pcd Shenzhen	SIZE	DWG NO.
CAD FILE	.XX	ANGLES ± 0.5°		ENGR	A3	ASVG06RRS2851SCXXGZLC	2
ORIGINAL NOT FOR CUSTOMER DISTRIBUTION				CHKD	CODE:	SCALE 3:2	SHEET 1 OF 1
				APPD	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN		

**ASVG SERIES
PLUG, 28-51 S**