

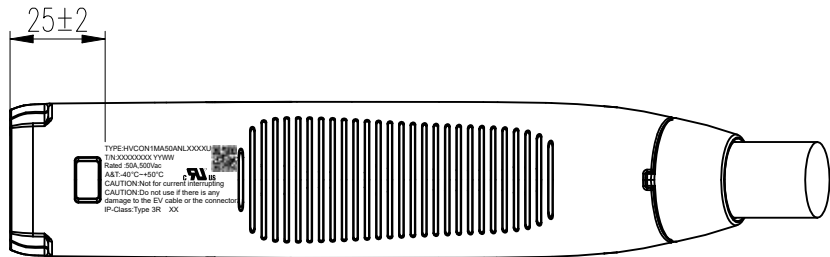
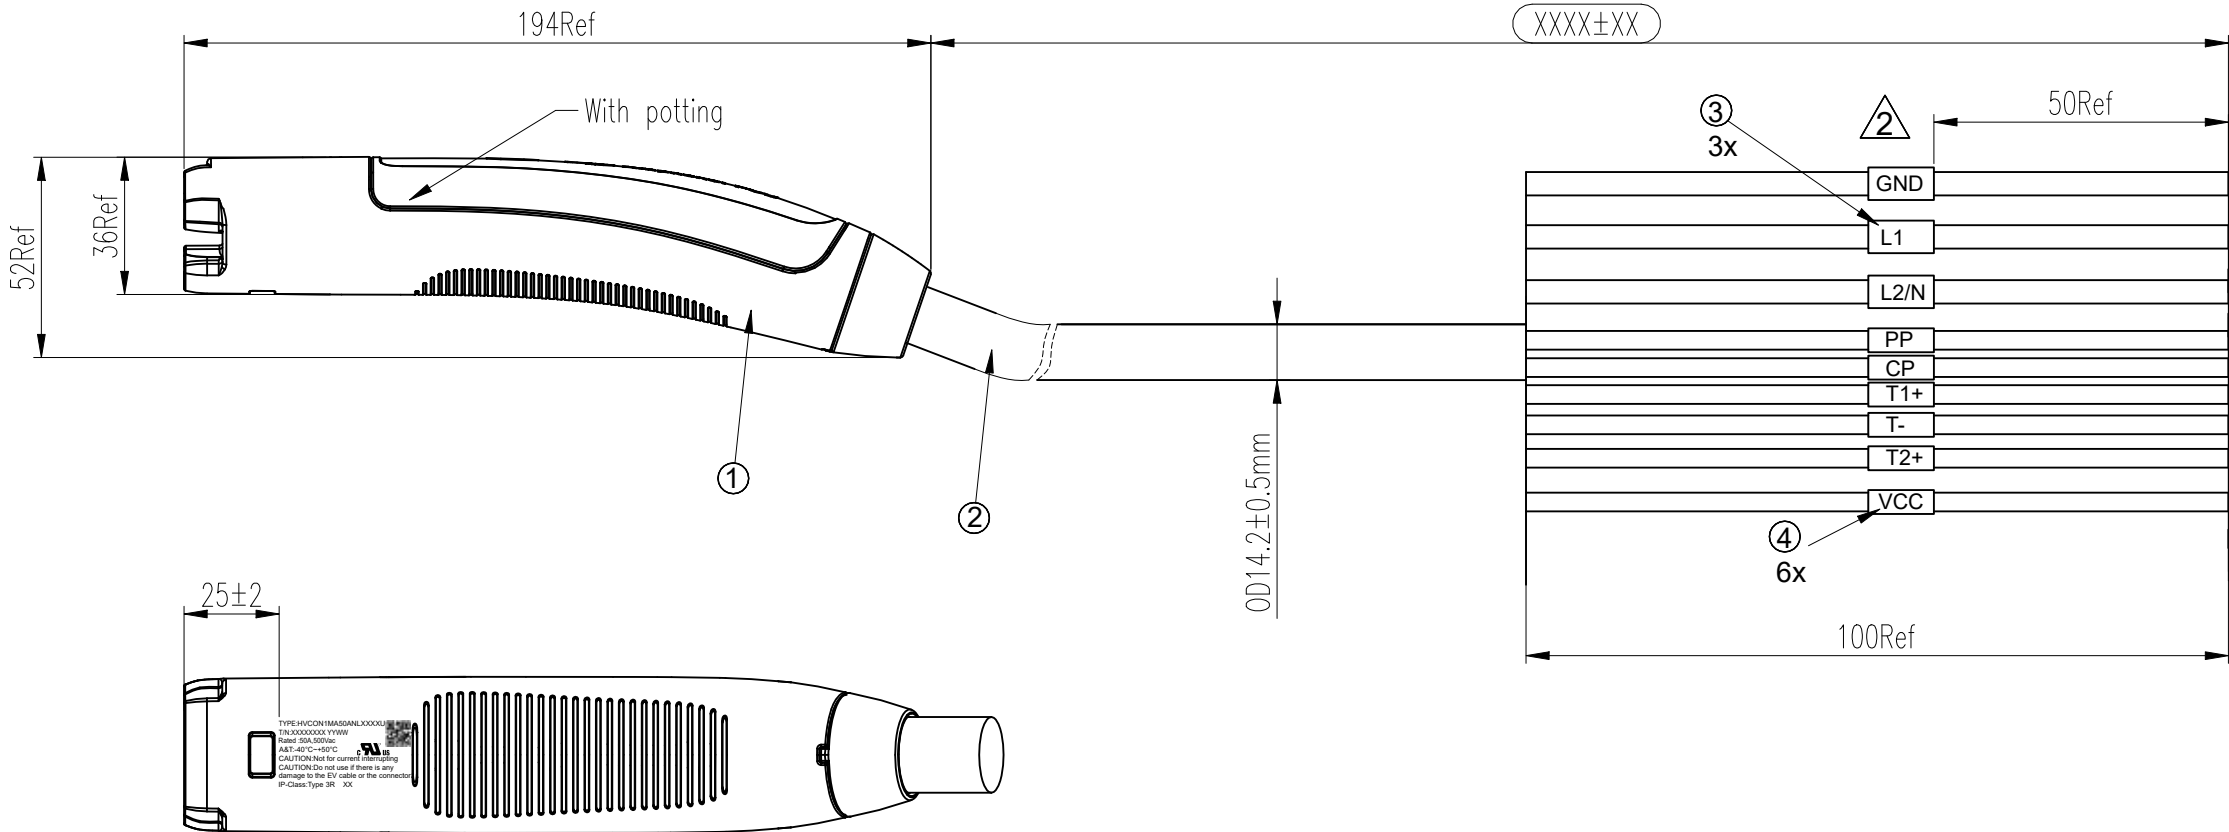
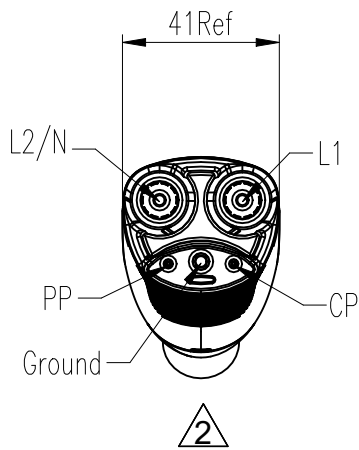


REV	ECN	DESCRIPTION	DATE	MODIFIED
1		RELEASE	Oct-23-2023	
2	R8158W	CHANGE 1000V TO 500V & 3S TO 3R	Jun-03-2024	

Amphenol PCD
ORIGINAL
PDF Format
R&D

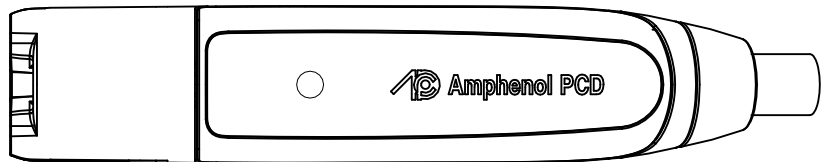

LASER MARKING

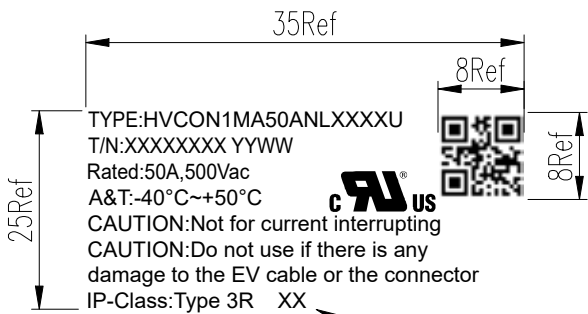


QR code,
Content including:Part number
#Work order number
Serial number ex:0001
(ex:HVCN1MA50ANLXXXXU#XXXXXXXX#0001)

CN:Made in China
MX:Made in Mexico
US:Made in US

T/N:XXXXXXXXYYWW
Work order number + batch number+year+Week
Font: Arial

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol PCD Shenzhen		TITLE			
ANSI Y14.5M	.X ± 0.50		ENGR		NACS AC 50A VEHICLE CONNECTOR WITH UHF CABLE ASSEMBLY			
UNITS: MM	.XX ± 0.05		Oct-23-2023					
CAD FILE	ANGLES ± 2°							
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROGroundRTY OF Amphenol PCD Shenzhen Co. Ltd Amphenol PCD Shenzhen Co. Ltd RESERVES THE RIGHT TO CLARIFY THIS DRAWING		CHKD		SIZE	DWG NO.		REV
			APPD		A3	C-HVCON1MA50ANLXXXXU		2
						SCALE 1 :2		

AC Mode of Connection
WITH UHF

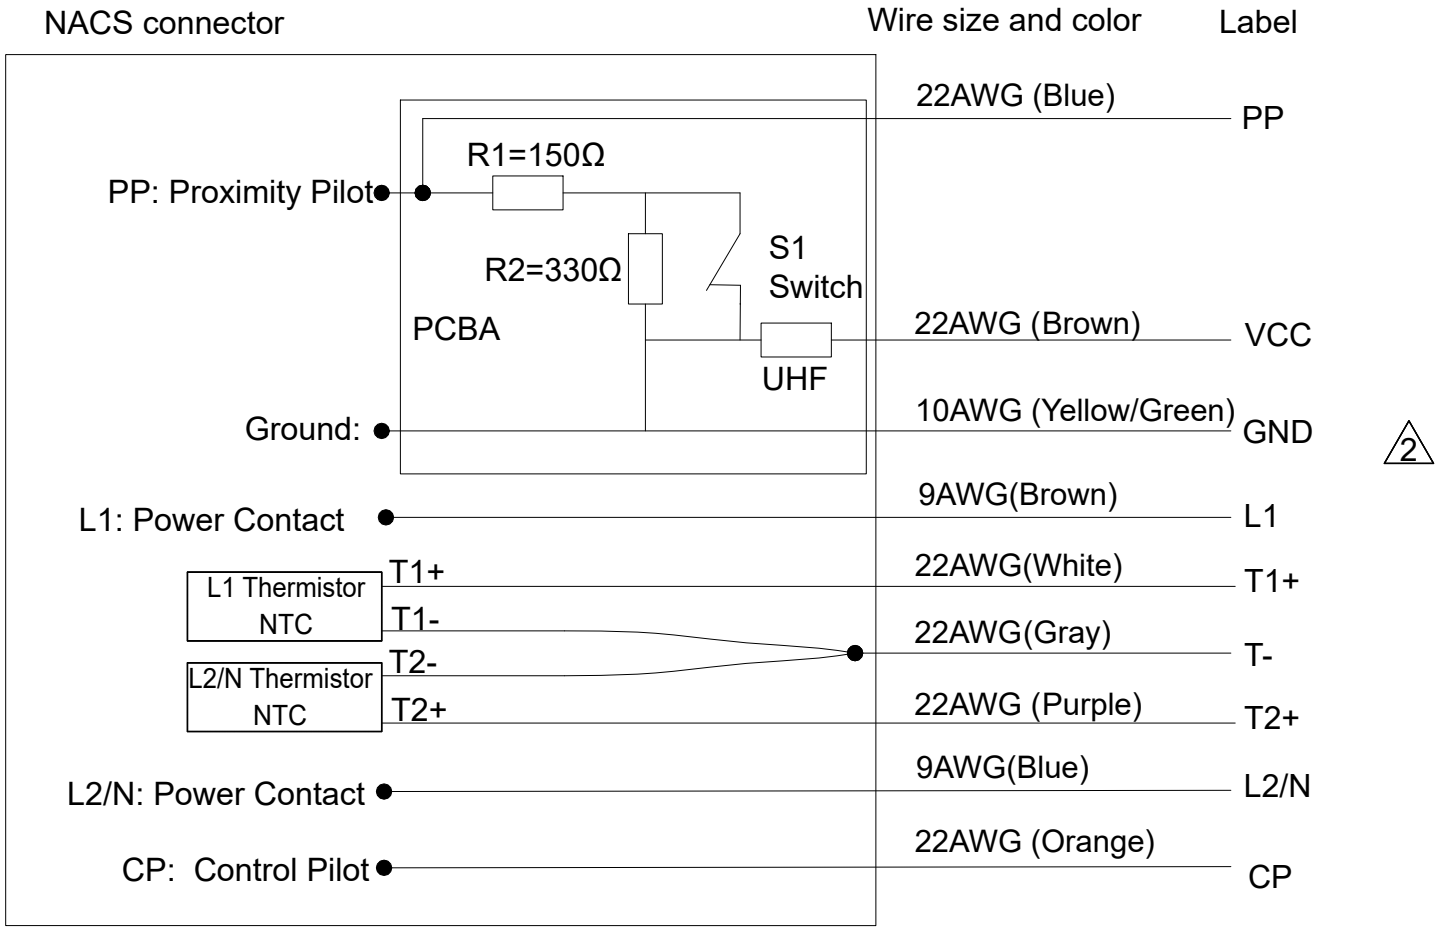

- *Notes:
- 1.Cable assembly data:
 - ✦ Rated Voltage: 500V AC(L1&L2/N),30V DC(CP&PP);
 - ✦ Rated Current: 50A Max(L1&L2/N)
2A Max(CP&PP);
 - ✦ Insulation Resistance: 100MΩ Min(1000V DC FOR L1&L2/N,500V DC for others)
 - ✦ Withstand Voltage: 3000V/AC r.m.s(L1&L2/N); Others 500V/AC r.m.s
 - ✦ IP-Class: IP67(Enclosure);Type 3R(Plugged in)
 - ✦ RoHS Compliance
 - ◎ Durability: ≥ 10,000 cycles
- 2.Ambient Temperature: -40°C ~ +50°C(+55°C max,Current reduction required, when the working temperature is beyond 90°C)
- 3.NACS Plug reference: C-HVCON1MXXXAXL0000X
- 4.Cable Minimum Bending Radius: 5 OD @Fixed installation, 9 OD@Free movement or Under mechanical load
- 5.Weight of Cable: app 340g/m
- 6.VCC:3.3-12V;<100mA;UHF:315MHZ
- 7.Standard:UL2251;TS-0023666;J3400
- 8.Cable Length Tolerance:

Total Length	Tolerance
0~1000mm	±50
1001~5000mm	±100
>5000mm	±200

④	P05B000002	SINGLE-WALL H.S.T: Ø2.5 WHITE	0.12	m
③	P05B000006	SINGLE-WALL H.S.T: Ø6.0 WHITE	0.06	m
②	P01BC00510	2X9AWG+10AWG+6X22AWG BLACK OD14.2	AR	m
①	HVCON1MA50A	NACS 50A VEHICLE CONNECTOR 2XNTC	1	EA
ITEM	P/N	DESCRIPTION	QTY	UNIT
		SIZE	DWG NO.	REV
		A3	C-HVCON1MA50ANLXXXXU	2
			SCALE	SHEET
			NA	2 OF 2