

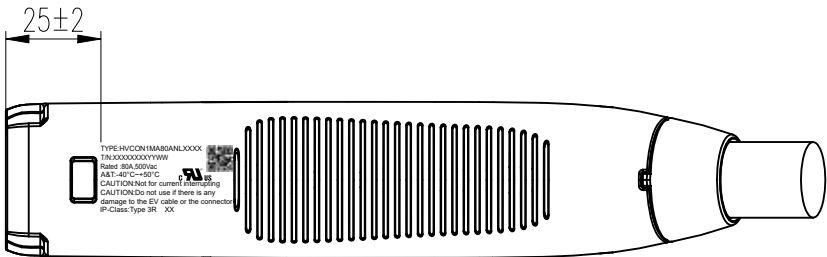
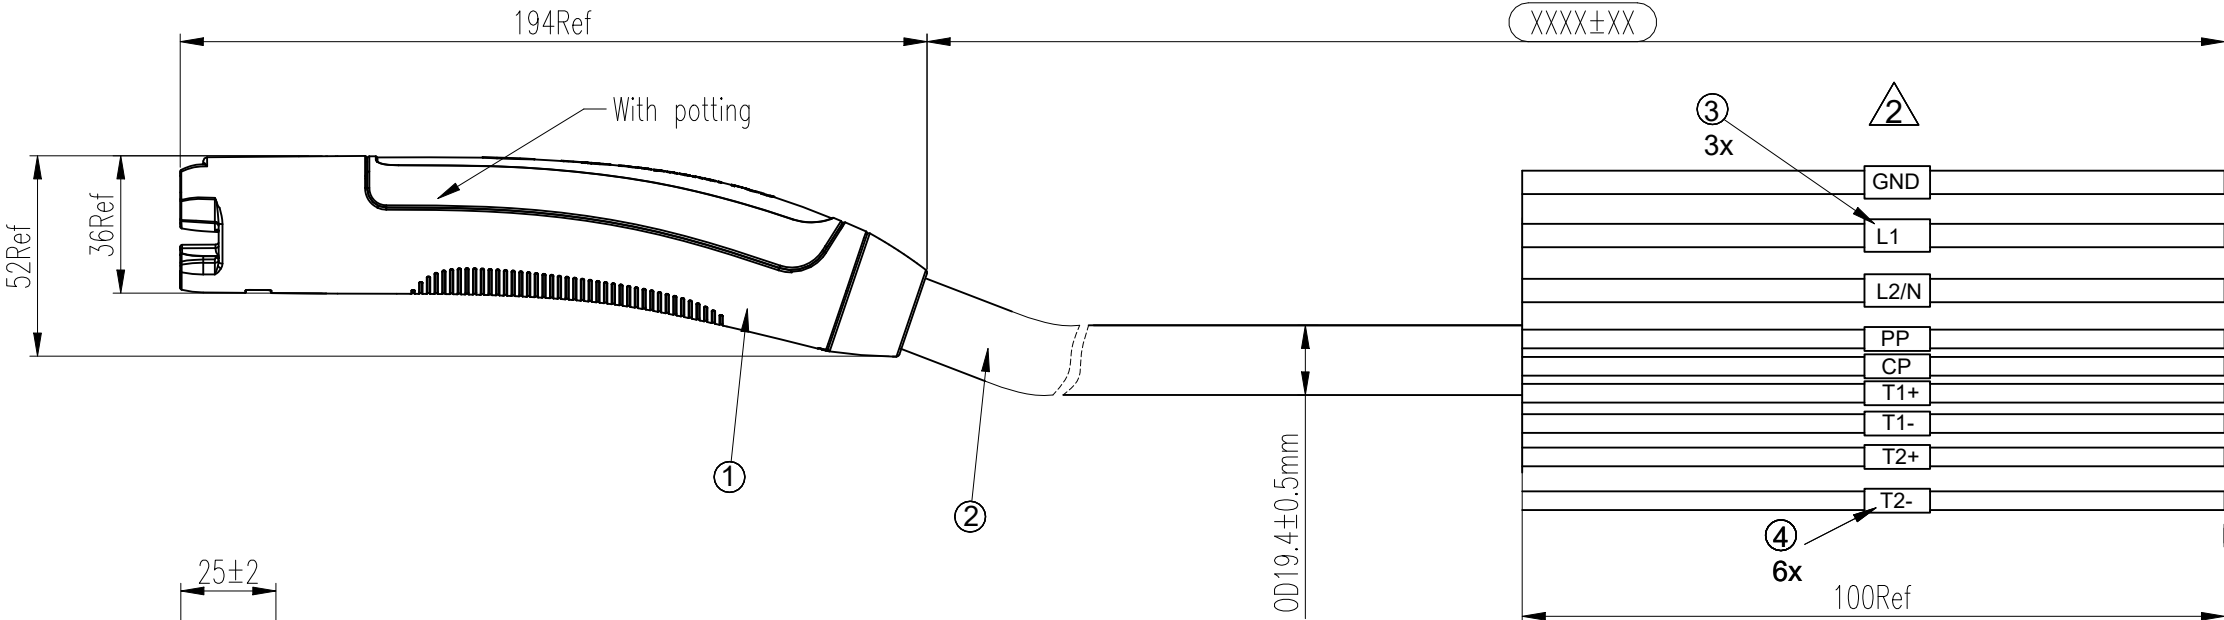
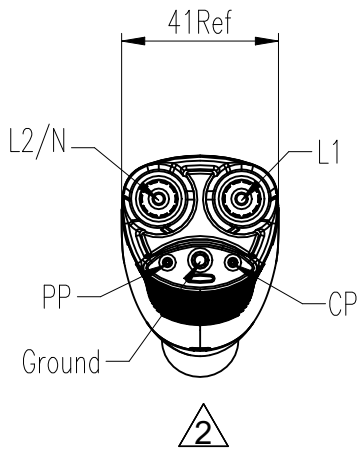


REV	ECN	DESCRIPTION	DATE	MODIFIED
1		RELEASE	Oct-23-2023	
2	R8158W	CHANGE 1000V TO 500V & 3S TO 3R	Jun-03-2024	

Amphenol PCD
ORIGINAL
PDF Format
R&D

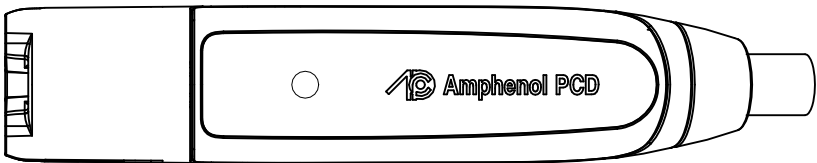

LASER MARKING

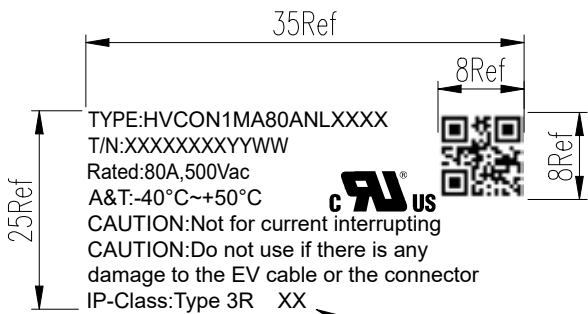


QR code,
Content including:Part number
#Work order number
Serial number ex:0001
(ex:HVCON1MA80ANLXXXX#XXXXXX#0001)

CN:Made in China
MX:Made in Mexico
US:Made in US

T/N:XXXXXXXXXXYYWW
Work order number + batch number+year+Week
Font: Arial

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol PCD Shenzhen		TITLE			
ANSI Y14.5M	.X ± 0.50		ENGR		NACS AC 80A VEHICLE CONNECTOR WITHOUT UHF CABLE ASSEMBLY			
UNITS: MM	.XX ± 0.05		Oct-23-2023					
CAD FILE	ANGLES ± 2°				SIZE	DWG NO.		REV
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROGroundRTY OF Amphenol PCD Shenzhen Co. Ltd Amphenol PCD Shenzhen Co. Ltd RESERVES THE RIGHT TO CLARIFY THIS DRAWING		CHKD		A3	C-HVCON1MA80ANLXXXX		2
			APPD					
						SCALE 1 :2	SHEET 1 OF 2	

AC Mode of Connection
WITHOUT UHF

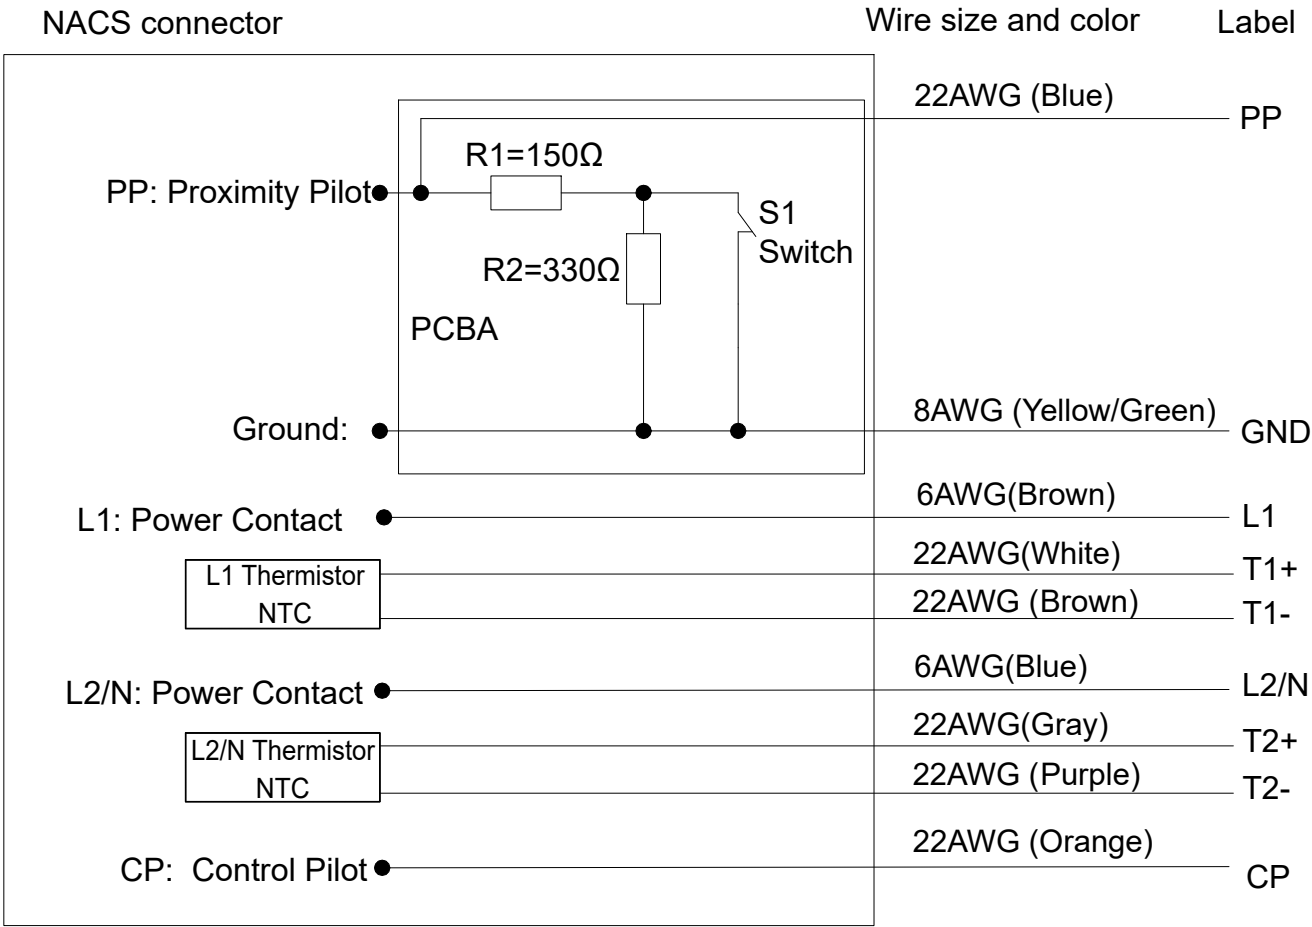

*Notes:

- Cable assembly data:
 - ✦ Rated Voltage: 500V AC(L1&L2/N),30V DC(CP&PP);
 - ✦ Rated Current: 80A Max(L1&L2/N)
2A Max(CP&PP);
 - ✦ Insulation Resistance: 100MΩ Min(1000V DC FOR L1&L2/N,500V DC for others)
 - ✦ Withstand Voltage: 3000V/AC r.m.s(L1&L2/N); Others 500V/AC r.m.s
 - ✦ IP-Class: IP67(Enclosure);Type 3R(Plugged in)
 - ✦ RoHS Compliance
 - ◎ Durability: ≥ 10,000 cycles
- Ambient Temperature: -40°C ~ +50°C(+55°C max,Current reduction required, when the working temperature is beyond 90°C)
- NACS Plug reference: C-HVCON1MXXXAXL0000X
- Cable Minimum Bending Radius: 5 OD @Fixed installation, 9 OD@Free movement or Under mechanical load
- Weight of Cable: app 590g/m
- Standard:UL2251;TS-0023666;J3400
- Cable Length Tolerance:

Total Length	Tolerance
0~1000mm	±50
1001~5000mm	±100
>5000mm	±200

④	P05B000002	SINGLE-WALL H.S.T: Ø2.5 WHITE	0.12	m
③	C210021008	SINGLE-WALL H.S.T: Ø8.0 WHITE	0.06	m
②	P01BC00509	2X6AWG+8AWG+6X22AWG BLACK OD19.4	AR	m
①	HVCON1MA80A	NACS 80A VEHICLE CONNECTOR 2XNTC NO UHF	1	EA
ITEM	P/N	DESCRIPTION	QTY	UNIT

SIZE	DWG NO.	REV
A3	C-HVCON1MA80ANLXXXX	2
SCALE	NA	SHEET 2 OF 2